




# HP Premium Instant-dry Satin Photo Paper



## The HP DesignJet printing system—the complete solution

HP DesignJet printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide reliable, consistent results with every print.

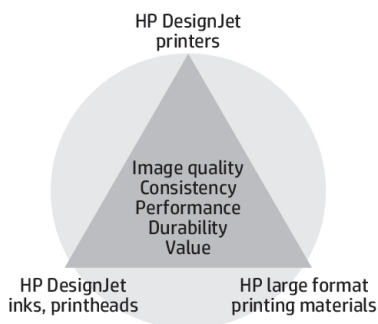

## See it instantly—images pop right off the page

### Impress with unrivaled image quality

Make an even bigger impression. Improved HP Premium Instant-dry Satin Photo Paper delivers unrivaled image quality for brilliant photos and high-impact display graphics—from posters and presentations to retail graphics.

### Save time and money with instant-dry prints

Save time, streamline your workflow, and increase your productivity. Prints dry instantly for immediate handling and lamination. And HP Premium Instant-dry Satin Photo Paper delivers the easy, trouble-free printing you expect from HP.

### Gain versatility, print with the environment in mind

Count on long-lasting prints with this FSC®-certified paper. Get great results for indoor display graphics, whether you're printing with HP dye- or pigment-based inks. And get exceptional print permanence, in-window<sup>1</sup> or away from direct sun.<sup>2</sup>

| Target customers         | Applications                         | Benefits  |
|--------------------------|--------------------------------------|---|
| Commercial photographers | Trade show and event displays        | Improved satin finish for better texture and gloss uniformity   |
| Photo labs               | Posters and presentations            | Better image quality with Original HP dye-based inks (more vivid colors, deeper blacks, finer detail) |
| Print service providers  | POP and retail displays              | Better image quality with Original HP pigment-based inks (deeper blacks)                              |
| Graphic designers        | Photo enlargements                   | Noticeably whiter sheet   |
| Artists                  | Art reproductions                    | Higher opacity  |
|                          | Geographic Information Systems (GIS) | Durable, long-lasting prints  |
|                          |                                      | FSC®-certified paper  |
|                          |                                      | Recyclable through commonly available programs <sup>3</sup>   |

<sup>1</sup> With Original HP 771 Vivid Photo Inks. Interior in-window display ratings by HP Image Permanence Lab on a range of HP media. HP predictions based on test data under Xenon-Arc illuminant—calculation assumes 6,000 Lux/12 hr day. For more information, see [HPLFMedia.com/printpermanence](http://HPLFMedia.com/printpermanence).

<sup>2</sup> With Original HP 772, HP 91, or HP 70 Photo Inks, or HP 771 Vivid Photo Inks or HP 83 UV inks. Display permanence rating for interior displays/away from direct sunlight, under glass by HP Image Permanence Lab and/or by Wilhelm Imaging Research, Inc. on a range of HP media. For more information, see [HPLFMedia.com/printpermanence](http://HPLFMedia.com/printpermanence).

<sup>3</sup> In North America and Asia (including Japan), recyclable in consumer collection systems that can accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collection systems that accept liquid packaging.



## Technical specifications

### HP Premium Instant-dry Satin Photo Paper

For the latest ICC profiles/paper presets, please visit [HPLFMedia.com/hp/paperpresets..](http://HPLFMedia.com/hp/paperpresets..)

|   |   |                                   |                  |                |
|---|---|-----------------------------------|------------------|----------------|
| <b>Weight</b>   | 260 g/m <sup>2</sup> per ISO 536 Test Method  |                                   |                  |                |
| <b>Thickness</b>  | 261 microns/10.3 mil per ISO 534 Test Method  |                                   |                  |                |
| <b>Opacity</b>  | 97% per TAPPI T-425 Test Method   |                                   |                  |                |
| <b>Brightness</b>   | 92% per TAPPI T-452 Test Method   |                                   |                  |                |
| <b>Whiteness</b>  | 104 per CIE Ganz 82 Test Method   |                                   |                  |                |
| <b>Finish</b>   | Satin   |                                   |                  |                |
| <b>Operating temperature</b>                                  | 15 to 30° C / 59 to 86° F   |                                   |                  |                |
| <b>Operating humidity</b>                                     | 30 to 80% RH  |                                   |                  |                |
| <b>Display permanence (Indoor home or office)</b>             | Up to 200 years with Original HP 772, HP 91, or HP 70 Photo Inks, or HP 771 Vivid Photo Inks; up to 100 years with HP 83 UV inks <sup>4</sup>   |                                   |                  |                |
| <b>Display permanence (Commercial in-window, unlaminated)</b> | Up to 1 year with Original HP 771 Vivid Photo Inks <sup>5</sup>   |                                   |                  |                |
| <b>Display permanence (Commercial in-window, laminated)</b>   | Up to 2 years with Original HP 771 Vivid Photo Inks <sup>5</sup>  |                                   |                  |                |
| <b>Water resistance</b>                                       | Water resistant with Original HP 772, HP 91, or HP 70 Photo Inks, or HP 771 Vivid Photo Inks <sup>6</sup>   |                                   |                  |                |
| <b>Dry time</b>   | Less than 2 minutes (at 23° C, 50% RH)  |                                   |                  |                |
| <b>Lamination</b>   | Yes, hot or cold  |                                   |                  |                |
| <b>Shelf life</b>   | 2 years, unopened in original packaging   |                                   |                  |                |
| <b>Storage temperature</b>                                    | 18 to 30° C / 64 to 86° F   |                                   |                  |                |
| <b>Storage humidity</b>                                       | 35 to 65% RH  |                                   |                  |                |
| <b>Recyclability</b>  | In North America and Asia (including Japan), recyclable in consumer collection systems that can accept mixed paper (may not be recyclable in your area); in Europe recyclable in consumer collection systems that accept liquid packaging |                                   |                  |                |
| <b>Country of origin</b>                                      | Product of Germany  |                                   |                  |                |
| <b>Ordering information</b>                                   | <b>Product numbers</b>  | <b>Roll sizes</b>                 | <b>UPC codes</b> | <b>Region</b>  |
|   | Q7992A  | 610 mm x 22,9 m (24 in x 75 ft)   | 848412013337     | Worldwide      |
|   | Q7994A  | 914 mm x 30,5 m (36 in x 100 ft)  | 848412013344     | Worldwide      |
|   | Q7996A  | 1067 mm x 30,5 m (42 in x 100 ft) | 848412013351     | Worldwide      |
|   | Q7998A  | 1270 mm x 30,5 m (50 in x 100 ft) | 848412013368     | Americas, Asia |
|   | Q8000A  | 1524 mm x 30,5 m (60 in x 100 ft) | 848412013375     | Worldwide      |
| <b>Warranty</b>   | HP large format printing materials are free from defects in materials and workmanship. For warranty statement, please see <a href="http://HPLFMedia.com/MediaWarranties">HPLFMedia.com/MediaWarranties</a> .                              |                                   |                  |                |

<sup>4</sup> Display permanence rating for interior displays/away from direct sunlight, under glass by HP Image Permanence Lab and/or by Wilhelm Imaging Research, Inc. on a range of HP media. For more information, see [HPLFMedia.com/printpermanence](http://HPLFMedia.com/printpermanence).

<sup>5</sup> Interior in-window display ratings by HP Image Permanence Lab on a range of HP media. HP predictions based on test data under Xenon-Arc illuminant—calculation assumes 6,000 Lux/12 hr day. For more information, see [HPLFMedia.com/printpermanence](http://HPLFMedia.com/printpermanence).

<sup>6</sup> Performance varies based on printer and print profile. Water resistance testing by HP Image Permanence Lab on a range of HP media and follows ISO 18935 method. For more information, see [HPLFMedia.com/printpermanence](http://HPLFMedia.com/printpermanence).



The mark of responsible forestry

Note: Not all FSC®-certified products are available in all regions.

COLORPRO  
TECHNOLOGY

For detailed information on the HP large format printing materials portfolio and to order, see [HPLFMedia.com](http://HPLFMedia.com)

